

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 121 889 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
08.08.2001 Bulletin 2001/32

(51) Int Cl.7: **A47L 5/28, A47L 5/32,**  
**A47L 9/00, A47L 9/24,**  
**A47L 9/28**

(21) Application number: 01101174.9

(22) Date of filing: 24.01.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: 31.01.2000 JP 2000021634  
09.02.2000 JP 2000031414  
18.02.2000 JP 2000040601  
15.06.2000 JP 2000179651

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL**  
**CO., LTD.**  
**Kadoma-shi, Osaka 571-8501 (JP)**

(72) Inventors:


- Hashizume, Kiyoshi  
Gamo-gun, Shiga 520-2564 (JP)
- Ito, Koichi  
Kanzaki-gun, Shiga 521-1224 (JP)
- Sunaba, Kenichiro  
Oumihachiman-shi, Shiga 523-0891 (JP)

(74) Representative: **Balsters, Robert et al**  
**Novapat International SA,**  
**9, rue du Valais**  
**1202 Genève (CH)**

(54) **Electric vacuum cleaner**

(57) An electric vacuum cleaner according to the present invention includes a cleaner main body 16, and a suction unit 24 which is rotatably disposed at the bottom of the cleaner main body 16 and includes a suction port 23 and a rotary brush 25. The cleaner main body 16 includes a dust collecting chamber 19, and a fan chamber 18 equipped with an electric fan 17 disposed at the bottom thereof. A handle 21 having a grip portion 20 and a control circuit board 22 are installed above the dust collecting chamber 19. Components such as the handle 21 and the electric fan 17 are installed at the rear of the cleaner main body 16. With this configuration, the vacuum cleaner is prevented from falling down when it is set upright. Further, the safety in use of the vacuum cleaner will be improved. Also, the user is able to easily use the vacuum cleaner. Furthermore, it is possible to finish assembling the component parts only at the rear of the vacuum cleaner. Accordingly, the number of parts to be assembled and disassembled can be decreased. Also, it is possible to shorten the time required for the assembling job and, further, to improve the workability.

Fig. 2

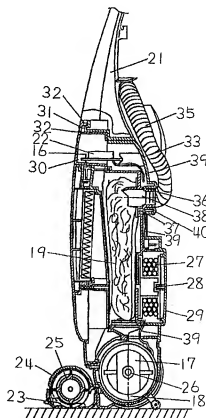

## Description

### FIELD OF THE INVENTION

[0001] The present invention relates to an upright electric vacuum cleaner having a suction unit rotatably disposed at the bottom of the cleaner main body, and a vacuum cleaner hose unit that provides communication between a dust collecting chamber and the suction unit.

### BACKGROUND OF THE INVENTION

[0002] Hitherto, an electric vacuum cleaner of this type has been configured as shown in Fig. 34. The configuration will be described in the following.

[0003] As shown in Fig. 34, a suction unit 2 includes a rotary brush 1, and the rotary brush 1 is rotatably installed at the bottom of a cleaner main body 3. A fan chamber 5 furnished with an electric fan 4 is disposed at the bottom of the cleaner main body 3. A dust collecting chamber 6 is disposed above the fan chamber 5. A handle 7 and a control circuit board 8 for the electric fan 4 are arranged further above the dust collecting chamber 6. A cord winding device 9 is disposed at the back of the dust collecting chamber 6.

[0004] The control circuit board 8 is covered with a cover 10 at the front of cleaner main body 3. The cord tape-up device 9 is covered with a cord winding device cover 11 at the rear of cleaner main body 3. Also, the electric fan 4 is covered and held with a motor cover 12 at the front of cleaner main body 3.

[0005] Also, when the vacuum cleaner is not used with its main body kept upright, the handle is turned, and a part of the turned handle is abutted against the floor so that the cleaner main body is prevented from falling down.

[0006] Also, a hose unit which provides communication between the dust collecting chamber of the cleaner main body and the suction unit is, as shown in Fig. 35, provided with screw thread 13a disposed on the inner wall of a connection pipe 13, and an adhesive agent 13b is applied to the grooves of thread 13a. The end of hose 14 is screwed in along the thread 13a of the connection pipe 13. Thus, the adhesive agent 13b hardens to secure the hose 14 and connection pipe 13, and thereby the hose unit 15 is formed.

[0007] However, in an electric vacuum cleaner as shown in Fig. 34, when the electric fan 4 is assembled, the front portion of cleaner main body 3 is first assembled, followed by installation of the motor cover 12. On the other hand, when the cord tape-up device 9 is assembled, the rear portion of cleaner main body 3 is first assembled, followed by installation of the cord winding device cover 11. During the assembling job, it is necessary to properly turn around the cleaner main body 3, making the assembling job bothersome. Similarly, when the electric vacuum cleaner is disassembled for a servicing purpose, it is also necessary to properly turn

around the cleaner main body 3, making the job troublesome.

[0008] Further, when the vacuum cleaner is not used with its main body kept upright, the handle is turned, and a part of the turned handle is abutted against the floor so that the cleaner main body is prevented from falling down. Accordingly, the user has to turn the handle each time, and it causes a nuisance to the user. Furthermore, a handle turning mechanism is disposed at the root portion of the handle, causing a considerable limit to the design.

[0009] Also, in an electric vacuum cleaner having a removable hose, when the rear portion of the cleaner main body is cleaned, removing the hose and fitting an attachment or the like thereto, there is a fear of falling down of the cleaner main body.

[0010] Further, in the case of using a hose unit as shown in Fig. 35, the hose unit includes the screw thread 13a arranged on the inner wall of connection pipe 13, causing the die cost to become higher and the molding cycle time to become longer, resulting in higher molding costs. Also, since it is difficult to provide the crest and bottom of the screw thread 13a with a great difference in level, making it absolutely necessary to use the adhesive agent 13b to secure the connection pipe 13 and the hose 14. Furthermore, the adhesive agent 13b may flow into the connection pipe 13 or the hose 14 during the connecting job. In addition, there is a fear of air leakage due to insufficient adhesion. Also, there exist problems of inadequate adhesion and longer hardening time of the adhesive agent. Thus, a conventional electric vacuum cleaner has many problems to be solved.

### SUMMARY OF THE INVENTION

[0011] It is the primary object of the present invention to reduce the product costs by decreasing the number of components to be assembled and disassembled, and also to shorten the time required for assembling the components and to improve the workability.

[0012] Also, it is the second object of the present invention to obtain an electric vacuum cleaner such that, when the vacuum cleaner is not used with its main body kept upright, the user is not required to operate a handle or any other preventive mechanism to prevent the cleaner main body from falling down, thereby improving the usability and the design convenience including the handle.

[0013] Further, it is the third object of the present invention to obtain an electric vacuum cleaner such that, when the rear portion of the cleaner main body is cleaned, removing the hose from the suction unit and fitting an attachment or the like thereto, the cleaner main body does not fall down even if the hose is strongly pulled backward, thereby improving the safety and the usability.

[0014] Also, it is the fourth object of the present invention to provide a high-quality hose unit for electric vac-

uum cleaners.

[0015] An electric vacuum cleaner to achieve the primary object of the present invention comprises a cleaner main body, and a suction unit which is rotatably disposed at the bottom of the cleaner main body and is provided with a suction port and a rotary brush, wherein the cleaner main body includes a dust collecting chamber disposed above a fan chamber equipped with an electric fan disposed at the bottom thereof, and a handle having a grip portion and a control circuit board above the dust collecting chamber. The components such as the handle and the electric fan are installed at the rear of cleaner main body.

[0016] In this way, since the components of the handle and the electric fan or the like are installed only at the rear of cleaner main body, it is not necessary to turn around the cleaner main body when assembling the components. So, the number of components to be assembled and disassembled may be decreased, resulting in lower product costs. Further, it is possible to shorten the time required for the assembling job and to improve the workability.

[0017] Also, in an electric vacuum cleaner to achieve the second object of the present invention, a cleaner main body having a dust bag furnished with an electric fan is mounted for universal movement on a suction unit having a suction port to take in dust, and a support portion is retractably or rotatably disposed on the cleaner main body in order to support the cleaner main body. The support portion nearly abuts on the floor surface only when the cleaner main body is in an upright position due to a mechanism formed at a part of the cleaner main body. The configuration is such that the support portion's abutment on the floor surface is outside the plane projected on the floor surface by the caster roller and the front end of the suction unit.

[0018] Thus, when the cleaner main body is set upright after using, the support portion is automatically abutted on the floor surface by the function of a cam mechanism so that the cleaner main body is hard to fall down. The user is able to make the cleaner main body hard to fall down without operating a handle or any other preventive mechanism, and it is possible to improve the usability and the design convenience including the handle.

[0019] Also, in an electric vacuum cleaner to achieve the third object of the present invention, a cleaner main body equipped with a dust collecting chamber and an electric fan is mounted for universal movement on a suction unit having a suction port to take in dust, and a connection hose detachably connected to the suction unit provides communication between the suction unit and the dust collecting chamber, and a support portion is retractably disposed on the cleaner main body in order to make the cleaner main body hard to fall down. When the hose is disconnected from the suction unit, the support portion protrudes behind the rotational center of the caster roller.

[0020] With this configuration, when the rear portion of the cleaner main body is cleaned, removing the hose from the suction unit and fitting an attachment or the like thereto, the cleaner main body does not fall down even if the hose is strongly pulled backward, and thereby it is possible to improve the safety and the usability.

[0021] Also, a hose unit for electric vacuum cleaners to achieve the fourth object of the present invention comprises a hose and a hose cover. The hose cover has a cylindrical portion in which the hose is inserted, and an opening is formed in a part of the cylindrical portion, and there is provided a protrusion on the inner wall of the cylindrical portion along the opening.

[0022] With this configuration, it is possible to structurally simplify the die to be used and to lower the cost. Also, the hose may be assembled without using an adhesive agent since the hose is guided by the protrusion, and thereby it is possible to improve the assembling workability and to obtain a high-quality hose unit for electric vacuum cleaners.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0023] Fig. 1 is a front view of an electric vacuum cleaner in accordance with the first embodiment of the present invention. Fig. 2 is a side view of the electric vacuum cleaner with parts broken away. Fig. 3 is an exploded perspective view of the electric vacuum cleaner. Fig. 4 is a back view of the electric vacuum cleaner with parts broken away.

[0024] Fig. 5 is a side view of an electric vacuum cleaner in accordance with the second embodiment of the present invention. Fig. 6 is a front view of the electric vacuum cleaner. Fig. 7 is a fragmentary sectional view of the electric vacuum cleaner. Fig. 8 is a rear view of the electric vacuum cleaner. Fig. 9 is an enlarged side view of essential parts of the electric vacuum cleaner with its main body inclined. Fig. 10 is an enlarged side view of essential parts of the electric vacuum cleaner with its main body kept in an upright position. Fig. 11 is an enlarged side view of essential parts of the electric vacuum cleaner with its caster roller removed. Fig. 12 is an enlarged side view of essential parts of the electric vacuum cleaner with its caster roller removed and main body kept at a generally horizontal position. Fig. 13 is a side view showing a state of the electric vacuum cleaner in operation. Fig. 14 is an enlarged side view of essential parts, showing a state of the electric vacuum cleaner in operation. Fig. 15 is a side view showing a state of the electric vacuum cleaner with attachments fitted thereto. Fig. 16 is a side view of essential parts of an electric vacuum cleaner in use of the third embodiment of the present invention, with its caster roller removed. Fig. 17 is an enlarged view of a cam of the electric vacuum cleaner.

[0025] Fig. 18 is a front view of an electric vacuum cleaner in accordance with the fourth embodiment of the present invention. Fig. 19 is a side view of the electric

vacuum cleaner. Fig. 20 is an enlarged side view of essential parts of the electric vacuum cleaner. Fig. 21 is a fragmentary sectional view of the electric vacuum cleaner. Fig. 22 is an enlarged rear view of essential parts of the electric vacuum cleaner. Fig. 23 is an enlarged side view of essential parts of the electric vacuum cleaner. Fig. 24 is a side view of a support portion of the electric vacuum cleaner. Fig. 25 is a side view of a state of the electric vacuum cleaner in operation. Fig. 26 is an enlarged rear view of essential parts of an electric vacuum cleaner in accordance with the fifth embodiment of the present invention. Fig. 27 is an enlarged side view of essential parts of the electric vacuum cleaner. Fig. 28 is an enlarged side view of essential parts of the electric vacuum cleaner. Fig. 29 is a front view of an electric vacuum cleaner in accordance with the sixth embodiment of the present invention.

[0026] Fig. 30 is a sectional view of essential parts of a hose unit for electric vacuum cleaners in accordance with the seventh embodiment of the present invention. Fig. 31 is a perspective view of a hose cover of the hose unit for electric vacuum cleaners. Fig. 32 (a) is a sectional view of the hose cover of the hose unit for electric vacuum cleaners. Fig. 32 (b) is a side view of the hose cover of the hose unit for electric vacuum cleaners. Fig. 33 is a front view of the hose cover of the hose unit for electric vacuum cleaners.

[0027] Fig. 34 is a side view of a conventional electric vacuum cleaner with parts broken away. Fig. 35 is a sectional view of essential parts of a hose unit for electric vacuum cleaners of conventional type.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0028] The first embodiment of the present invention will be described in the following with reference to Fig. 1-Fig. 4.

[0029] As shown in Fig. 1 and Fig. 2, a cleaner main body 16 comprises a fan chamber 18 equipped with an electric fan 17 at the bottom thereof, a dust collecting chamber 19 formed above the fan chamber 18, a handle 21 having a grip portion 20 and a control circuit board 22 to control the electric fan 17, which is located above the dust collecting chamber 19.

[0030] At the bottom of cleaner main body 16 is located a suction unit 24 having a suction port 23 to take in dust or the like on the floor surface. The suction unit 24 is furnished with a rotary brush 25 to gather up dust or the like on the floor surface. The cleaner main body 16 is rotatably supported on a rotary shaft 26 in the suction unit 24.

[0031] A cord winding device 28 to store a cord 27 is located behind the dust collecting chamber 19 at the rear of the cleaner main body 16. The electric fan 17 is also disposed at the rear of cleaner main body 16 and is finally covered by a cover 29 together with the cord winding device 28, and is secured by screws or the like.

The control circuit board 22 is stopped by a rib 30 provided in the cleaner main body 16, and protrusion 31 of the handle 21 is press-fitted by a guide rib 32 provided in the cleaner main body 16. A cover 33 serves to cover and secure the control circuit board 22 and handle 21.

[0032] A connection pipe 34 is connected to a hose 35 in communication with a suction port 23, and one end of same is connected to an air intake pipe 36. The air intake pipe 36 is rotatably disposed at rear portion 37 of the dust collecting chamber 19 and is connected to a connection port 38.

[0033] Also, as shown in Fig. 2 and Fig. 4, wiring 39 from the electric fan 17 and the control circuit board 22 is tight held by circularly arcuate rib 39a formed between the dust collecting chamber 19, cover 29 and the cover 33 outside the dust collecting chamber 19.

[0034] Also, as shown in Fig. 2, a generally arcuate protrusion 40 is disposed at the outer periphery of the air intake pipe 36 connected to the hose 35 at the back of the cleaner main body 16.

[0035] Actions in the above configuration will be described in the following. As shown in Fig. 3, when the cleaner main body 16 is assembled, attachments such as handle 21, control circuit board 22, electric fan 17, and cord winding device 28 are installed at the rear of cleaner main body 16. Accordingly, parts assembling can be finished only by doing the job at the rear of the cleaner main body and it is possible to shorten the time required for the assembling job and to improve the workability. Also, since two component parts such as electric fan 17 and cord winding device 28 are covered by only one cover 29, it is possible to decrease the number of component parts.

[0036] Further, the wiring 39 from the electric fan 17 and the control circuit board 22 is tight held by the circularly arcuate rib 39a formed between the dust collecting chamber 19, cover 29 and the cover 33 outside the dust collecting chamber 19. Accordingly, there is no notch for the wiring 39 led into the dust collecting chamber 19, and it is possible to improve the air-tightness in the dust collecting chamber 19 and to obtain sufficient dust collecting effects. Also, it is possible to simplify the internal structure of the dust collecting chamber 19, making the die construction easier, and to lower the manufacturing cost.

[0037] Also, a generally arcuate protrusion 40 is disposed at the outer periphery of air intake pipe 36 connected to the hose 35 at the back of cleaner main body 16. Accordingly, the generally arcuate protrusion 40 may prevent the hose 35 from curving too sharp, and when the hose 35 is greatly curved, it is possible to protect the hose 35 by the generally arcuate protrusion 40, and thereby, the hose 35 is prevented from being damaged.

[0038] Next, the second embodiment of the present invention will be described in the following with reference to Fig. 5 - Fig. 15.

[0039] As shown in Fig. 5 - Fig. 7, a suction unit 41 is

equipped with a rotary brush 42 to gather up dust, and a cleaner main body 43 is disposed for universal movement on the suction unit 41. The cleaner main body 43 comprises a main body front 43a and a main body rear 43b, and an electric fan 44 to suck up dust and a cord winding device 46 to store a cord 45 are disposed therebetween. A dust bag 47 functions to collect dust. A dust collecting chamber lid 48 can be opened or closed when attaching or detaching the dust bag 47. A filter retainer 49 detachably retains an exhaust filter 50 to catch fine dust contained in the air discharged by the electric fan 44.

[0040] A rotary brush 42 is equipped with a small-sized drive motor 51, and there is provided a semi-transparent window 52 there above so that the operation of the rotary brush 42 can be checked from outside. Also, the cleaner main body 43 and the suction unit 41 are, as shown in Fig. 8, connected to each other by a detachable hose 53.

[0041] Next, as shown in Fig. 9 ~ Fig. 12, the outer case of the suction unit 41 includes a suction unit top 41a and a suction unit bottom 41b, and at the same time, a rotary shaft 43c having a main body front 43a and a main body rear 43b is sandwiched between the suction unit top 41a and the suction unit bottom 41b, thereby forming a bearing portion 41c.

[0042] A caster roller 54 is rotatably installed on a roller mount portion 43e that is coaxial with a rotary shaft 43c located at the bottom of cleaner main body 43, and is secured by a roller retaining plate 55. The roller mount portion 43e is nearly identical in outer diameter with the caster roller 43, and covers the electric fan 44.

[0043] A support plate 56 includes a support portion which serves to prevent the cleaner main body 43 from falling down easily. When an action point 56b is pushed backwardly by cam 43d disposed in the main body rear 43, then a small roller retaining portion 56c is forced down, and at the same time, a small roller 57 rotatably disposed on the small roller retaining portion 56c is abutted on the floor surface. Two small rollers 57 include a spacer 58 therebetween and are rotatable on a rotary shaft 59. Also, the support plate 56 is activated upwardly by a tension spring 60.

[0044] A release pedal 61 is operated when shifting down the cleaner main body 43. The release pedal 61 is formed so as to protrude neither from the rear end nor from the front end of caster roller 54, and is abutted against the caster roller 54 when operated.

[0045] Actions in the above configuration will be described in the following. When the cleaner main body 43 is inclined in use, as shown in Fig. 9 or Fig. 11, the support plate 56 moves apart from the cam 43d formed at the main body rear 43b and is activated upwardly by the tension spring 60, and the small roller 57 moves up apart from the floor surface so that the vacuum cleaner may be operated smoothly even on a long-pile fluffy carpet or the like. Also, the suction unit 41 can be freely moved up or down as needed.

[0046] Also, as shown in Fig. 10, when the cleaner main body 43 is set upright after using, the action point 56b of the support plate 56 abuts on the cam 43d. The support plate 56 rotates on the rotary shaft 56a and then the small roller 57 abuts on the floor surface to support the cleaner main body 43. Thus, it is possible to prevent the cleaner main body from falling down especially in the backward direction.

[0047] Here, the small roller 57 is rotatably disposed on the small roller retaining portion 56c of the support plate 56. So, as shown in Fig. 13, it is possible to smoothly move the vacuum cleaner, without dragging the suction unit 41, due to the small roller 57, with the cleaner main body 43 kept upright.

[0048] Also, when moving the vacuum cleaner in a state of Fig. 13, if the support plate 56 and the small roller 57 are given strong shocks due to an undulated floor surface or the like, then the support plate 56, which is freely movable in the forward direction, as shown in Fig. 14, will be shifted to the opposite side, causing the caster roller 54 to take over the role, and thereby, it is possible to prevent the support plate 56 and the small roller 57 from damage or the like.

[0049] Further, as shown in Fig. 15, with the cleaner main body 43 kept upright, connecting portion 53a of the hose 53 is disconnected from the suction unit 41, and attachment nozzle 64a, 64b (see Fig. 8) is connected to the connecting portion 53a of the hose 53 directly or via extension pipe 63. In case of cleaning a sofa, furniture or the like, even when the hose 53 is pulled backwardly at the back of cleaner main body 43, the cleaner main body 43 will not fall down because the support plate 56 abuts on the floor surface to support the cleaner main body 43, and it is easier to carry out the cleaning job.

[0050] In this configuration, the support plate 56, which is retractably or rotatably disposed in order to make the cleaner main body 43 hard to fall down in an upright position, becomes nearly abutted on the floor surface only when the cleaner main body 43 is set upright, due to the cam 43d formed in a part of the cleaner main body 43. Further, the configuration is such that the abutment on the floor surface of the support plate 56 is outside the plane projected on the floor surface by the caster roller 54 and the front end portion of the suction unit 41. Accordingly, when the cleaner main body 43 is set upright after using, the support plate 56 is automatically abutted on the floor surface due to the cam 43d, thereby preventing the cleaner main body 43 from falling down. Thus, the user is not necessary to operate a handle or any other mechanism to prevent the cleaner main body 43 from falling down. So, it is possible to improve the usability and the design convenience including the handle.

[0051] Also, since the small roller 57 is rotatably disposed in the small roller retaining portion 56c of the support plate 56, the cleaner main body 43 may be freely moved in an upright position, that is, keeping the suction unit 41 and the cleaner main body 43 nearly at an angle

of 90°.

[0052] Further, with the cleaner main body 43 inclined in a state of using, the support plate 56 is activated by a spring or the like in a direction opposite to the floor surface so as to move the support plate apart by a specific distance from the floor surface. Accordingly, it is possible to prevent worsening of the workability, for example, due to a long-pile fluffy carpet or the like entangled in the support plate 56 during normal use of the vacuum cleaner. Also, when cleaning a lower back place such as under a bed, holding the cleaner main body 43 horizontally at nearly 180°, the support plate 56 will not limit the angle, for example by touching against the rear portion of the cleaner main body 43, and it is possible to assure same usability as is obtained with a conventional electric vacuum cleaner without such support plate 56.

[0053] Also, with the cleaner main body 43 set upright, the support plate 56 is retractably or rotatably formed in the direction of suction unit 41. So, when the cleaner main body 43 is moved, with the cleaner main body 43 kept upright, causing a strong shock to the support plate 56 due to an undulated floor surface or the like, the support plate 56 is turned and retracted in the direction of the suction unit 41, thereby preventing the support plate 56 and the small roller 57 from damage or the like.

[0054] Further, with the cleaner main body 43 inclined in a state of using, the support plate 56 is moved by a specific distance from the floor surface by the cam 43d provided in the cleaner main body 43. So, it is unnecessary to use a spring or the like to activate the support plate 56 in a direction opposite to the floor surface, and consequently, it is possible to lower the cost.

[0055] Also, with the cleaner main body 43 set upright, the hose 53 is connected to the cleaner main body 43, at the side where the support plate 56 abuts on the floor surface. So, when the vacuum cleaner is used, disconnecting the hose 53 from the suction unit 41 and connecting the removed hose 53 to an extension pipe or fitting an attachment to the end thereof, the support plate 56 abuts on the floor surface to support the cleaner main body 43, thereby preventing the cleaner main body 43 from falling down.

[0056] Further, the caster roller 54 is rotatably disposed on the roller mount portion 43e provided at the bottom of the cleaner main body 43, and the outer diameter of roller mount portion 43e is nearly identical with the outer diameter of caster roller 54. Accordingly, when cleaning a low back plate such as under a bed or a desk, it is possible to lessen the effects of catching or shocks caused by obstructions and to make the vacuum cleaner operation smooth and stable.

[0057] Also, a release pedal 61 is disposed, in which the release pedal 61 is operated when the cleaner main body 43 is inclining. The release pedal 61 is formed so as to protrude neither from the rear end nor from the top end of the caster roller 54. Accordingly, the release pedal does not touch furniture or the like during cleaning

and it is possible to smoothly perform the cleaning job without giving damage to furniture or the like.

[0058] Also, when the release pedal 61 is operated, the release pedal 61 abuts on the caster roller 54. So, when the cleaner main body 43 is inclined by stepping on the release pedal 61, the release pedal 61 touches the caster roller 54, making it unable to rotate. Then, the cleaner main body 43 does not move so that the release pedal may be precisely depressed, thereby improving the workability.

[0059] Further, the roller mount portion 43e covers the electric fan 44. So, it is possible to reduce the widthwise dimension of the cleaner main body 43, and as a result, to make the vacuum cleaner smaller in size and more compact.

[0060] Next, the third embodiment of the present invention will be described with reference to Fig. 16 and Fig. 17. In this embodiment, tension spring 60 used in the second embodiment is not necessary, and the cam used is different in shape from the one used in the second embodiment.

[0061] As shown in Fig. 16 and Fig. 17, a cam (shaded portion) 62 has a groove-like shape so that an action point 56b of support plate 56 may get in the groove. The cam 62 includes a fixing cam 62a that is a little wider than the action point 56b and serves to make a small roller 57 abut on the floor surface, a lifting cam 62c that serves to lift the small roller 57 off the floor surface, and a junction 62b that connects the cams to each other. The radius Rc of the lifting cam 62c is smaller than the radius Ra of the fixing cam 62a.

[0062] Actions in the above configuration will be described in the following. Even in case of installing no tension spring 60, when the cleaner main body 43 is inclined in use, the small roller 57 is off the floor surface since the action point 56b is at the position of the lifting cam 62c, and thereby it is possible to obtain at a low cost the same effects as in the second embodiment.

[0063] The fourth embodiment of the present invention will be described in the following with reference to Fig. 18-Fig. 25.

[0064] As shown in Fig. 18-Fig. 21, a suction unit 71 is furnished with a rotary brush 72 to gather up dust, and the suction unit 71 is disposed for universal movement in cleaner main body 73. The cleaner main body 73 comprises main a body front 73a and a main body rear 73b, and an electric fan 74 to suck up dust and a cord winding device 76 to store a cord 75 are disposed therebetween. A dust bag 77 functions to collect dust. A dust collecting chamber lid 78 can be opened or closed when attaching or detaching the dust bag 77. A filter retainer 79 detachably retains an exhaust filter 80 to catch fine dust contained in the air discharged by the electric fan 74.

[0065] A rotary brush 72 is equipped with a small-sized drive motor 81, and there is provided a semi-transparent window 82 there above so that the operation of the rotary brush 72 can be checked from outside. Also, the cleaner main body 73 and the suction unit 71 are,

as shown in Fig. 22, connected to hose fixing portion 88 provided in the suction unit 71 by a detachable hose 83.

[0066] The outer case of the suction unit 71 includes a suction unit top 71a and a suction unit bottom 71b, and at the same time, a rotary shaft 73c having a main body front 73a and a main body rear 73b is sandwiched between the suction unit top 71a and the suction unit bottom 71b. The cleaner main body 73 is disposed for universal movement in connection with the suction unit 71.

[0067] A caster roller 84 is coaxial with the rotary shaft of the cleaner main body 73 and is disposed at the main body front 73a, and is rotatably retained by a roller retaining plate 85.

[0068] A support portion 86 has its rotational center near a hose fixing portion 88 which serves to fix a hose 83 to the suction unit 71. With the cleaner main body 73 kept upright, when the hose 83 is removed from the hose fixing portion 88, the cleaner main body 73 does not fall down backwardly because of the support portion 86. As shown in Fig. 23 and Fig. 24, a rotary shaft 86a is formed in one piece therewith at the upper position and a small roller 87 as a traveling means is rotatably disposed at the lower end position, which is activated downwardly by a spring 89. A stopper 86b that serves to control the backward protrusion of the support portion 86 is formed in one piece therewith above the rotary shaft 86a. Also, when the hose 83 is fitted to the hose fixing portion 88, depression 83a formed in one piece with the hose 83 abuts on a guiding rib 86c provided in one piece with the support portion 86, pushing the support portion 86 forward, and thereby the hose is stored into the main body rear 73b.

[0069] A connection hose 90 serves to connect the suction port of the suction unit 71 to the hose fixing portion 88. A bearing 73c is disposed in the main body rear 73b and journals the support portion 86. A guard portion 86d is formed in one piece with the support portion 86 and partially covers the rear of the connection hose 90.

[0070] Actions in the above configuration will be described in the following. With the cleaner main body 73, kept upright, when the hose 83 is removed from the hose fixing portion 88, the retractable support portion 86 is pushed by the spring 89 and protruded backwardly from the center of the caster roller 84. When the hose 83 is fixed to the hose fixing portion 88, the depression 83a abuts on the guiding rib 86c, pushing the support portion 86 forwardly, and thereby the hose is stored into the main body rear 73b. Accordingly, the support portion 86 is automatically protruded only when needed, and it is possible without help of the user to prevent the cleaner main body 73 from falling down.

[0071] Also, since the small roller 87 is rotatably disposed at the lower end of the support portion 86, the support portion 86 may be smoothly retracted or protruded without catching therein even when the vacuum cleaner is operated on a long-pile fluffy carpet.

[0072] Also, since the support portion 86 is provided

with guard portion 86d, when the cleaner main body 73 is used, it is possible to prevent the connection hose 90 from being damaged by obstructions or the like on the floor surface.

[0073] Further, as shown in Fig 25, when the cleaner main body 73 is rotated about the small roller 87 and is somewhat inclined backwardly, with the support portion 86 protruded backward, since the protrusion of the support portion 86 is controlled by the stopper 86b, the center of the small roller 87 moves forward ahead of the rotary shaft 86a, causing the support portion 86 to be automatically retracted due to the weight of the cleaner main body 73. Accordingly, when the cleaner main body 73 being inclined is moved with the hose 83 disconnected, the support portion 86 may be automatically retracted. Further, it is possible to improve the usability.

[0074] In this configuration, when the suction unit 7 and the detachable hose 83 are removed, the support portion 86 protrudes backward behind the rotational center of the caster roller 84 in order to support the cleaner main body 73 in an upright position. Accordingly, when cleaning a place behind the cleaner main body 73 with an attachment or the like fitted thereto, removing the hose 83 from the suction unit 71, the cleaner main body 73 does not fall down in the backward direction even when the hose 83 is strongly pulled backward. In this way, it is possible to improve the safety and the usability.

[0075] Also, when the hose 83 is fitted to the hose fixing portion 88, a part of the hose 83 pushes the support portion 86 forward and abuts thereon, causing the support portion 86 to be retracted. Thus, the support portion 86 may be retracted without any help of the user.

[0076] Also, there is provided depression 83a at the abutment against the support portion 86 of hose 83, and a part of the support portion 86 is inserted into the depression 83a. So, when the hose 83 is fitted to the hose fixing portion 88, the support portion 86 may be easily pushed forward by the hose 83.

[0077] Further, the small roller 87 is mounted at the lower end portion of the support portion 86 which comes in contact with the floor surface. So, it is possible to smoothly protrude or retract the support portion 86 even when operating the vacuum cleaner on a long-pile fluffy carpet.

[0078] Also, the suction port of suction unit 71 is connected to the hose fixing portion 88 by means of the connection hose 90, with the support portion 86 retracted, the connection hose 90 is covered by guard portion 86d. Accordingly, when the cleaner main body 73 is used, it is possible to prevent the connection hose 90 from being damaged by obstructions or the like on the floor surface.

[0079] Further, when the cleaner main body 73 is somewhat backwardly inclined about the portion contacting with the floor surface at the lower end of the support portion 86, with the support portion 86 protruded backward, the portion contacting with the floor surface at the lower end of support portion 86 comes ahead of

the upper rotational center of the support portion 86, causing the support portion 86 to be automatically retracted due to the weight of the cleaner main body 73. Accordingly, when the cleaner main body 73 being inclined is moved with the hose 83 disconnected, the support portion 86 may be automatically retracted.

[0080] Next, the fifth embodiment of the present invention will be described with reference to Fig. 26-Fig. 28. In this embodiment, the support portion 86 used in the fourth embodiment is electrically protruded and retracted.

[0081] As shown in Fig. 26, the configuration is such that a switch 91 turns OFF with a hose 83 fixed on a hose fixing portion 88, and turns ON with the hose 83 removed from the hose fixing portion 88. A support portion 86 is protruded and retracted by means of a solenoid valve (not shown) and a tension spring (not shown). The support portion 86 is interlocked with the switch 91, and the support portion 86 is pushed backward when the switch 91 is ON. A small roller 87 is rotatably disposed at the rear end of the support portion 86.

[0082] Actions in the above configuration will be described in the following. When the hose 83 is fixed on the hose fixing portion 88, the switch 91 turns OFF and the support portion 86 is in a position as shown in Fig. 27. Next, when cleaning a place behind the cleaner main body 73, removing the hose 83 from the hose fixing portion 88, the switch 91 turns ON, and the support portion 86 is automatically pushed backward, as shown in Fig. 28, by the function of the solenoid. In this condition, the cleaner main body 73 may be prevented from falling down even when pulled backward.

[0083] Next, the sixth embodiment of the present invention will be described with reference to Fig. 29. In this embodiment, there is separately provided a switch which serves to protrude and retract the support portion 86 used in the fifth embodiment.

[0084] As shown in Fig. 29, a hand switch 93 is disposed in handle 92 fitted to cleaner main body 73, and the switch serves to protrude and retract the support portion 86. With the hand switch 93 turned ON, the support portion 86 is pushed backward by the function of a solenoid valve (not shown) and a tension spring (not shown).

[0085] Actions in the above configuration will be described in the following. When the hand switch 93 is operated by the user, the support portion 86 is protruded backward. When the vacuum cleaner is left for a while with its main body 73 kept upright, using an attachment or doing the cleaning job on an undulated floor surface, it is possible to protrude or retract the support portion 86 as needed, thereby diversifying the mechanism to prevent the cleaner main body 73 from falling down backward.

[0086] Also, the hand switch 93 is disposed in the handle 92, but it is not necessary, in this embodiment, to limit the position of the handle 92. The hand switch 93 may be installed in other places such as near the attach-

ment fixing portion of the cleaner main body 73, or in suction unit 71.

[0087] Next, the seventh embodiment of the present invention will be described with reference to Fig. 30-Fig. 33.

[0088] As shown in Fig. 30, a hose unit 100 includes a hose cover 101 and a hose 102 which are connected to a suction port (not shown) of a cleaner body (not shown). The hose cover 101, as shown in Fig. 31, has a cylindrical portion 103 in which the hose 102 is inserted. The cylindrical portion 103 has an opening 104. The cylindrical portion's inner wall 105 has a protrusion along the opening 104.

[0089] Also, as shown in Fig. 32, there are provided a protrusion 106 and a protrusion 107 at generally opposite positions of the cylindrical portion's inner wall 105. The positions of these protrusions 106 and 107 are asymmetrical to the central axis of the cylindrical portion 103, and the locus of a point such that it connects the protrusions 106 and 107 is generally spiral as against the central axis of the cylindrical portion 103. Also, as shown in Fig. 33, there is provided an abutment wall 109 so that the end of the hose 102 abuts on an end portion 108 of the cylindrical portion 103. There is also provided an inner tube 111 that generally contacts with the inner periphery 110 of the hose 102.

[0090] Actions in the above embodiment will be described in the following. In assembling the hose unit 100, the hose 102 may be completely inserted into the hose cover 101, by turning the hose cover, until the end of the hose 102 abuts against the abutment wall 109 provided on the cylindrical portion 103. In that case, since there is provided the abutment wall 109 on the cylindrical portion 103, it is always possible to completely insert the hose 102 into the cylindrical portion 103.

[0091] Further, the opening 104 is formed in the cylindrical portion 103, and there are provided protrusions on the cylindrical portion's inner wall 105 along the opening 104 in the cylindrical portion 103. Accordingly, as compared with a conventional screw thread configuration, it is easier to construct the die to be used, and is possible to increase the protrusions 106 and 107 in height. So, it is also possible to maintain the fastening strength of the hose cover 101 and the hose 102 without using an adhesive agent to secure the hose cover 101 and the hose 102.

[0092] Further, the positions of the protrusions 106 and 107 are asymmetrical to the central axis of the cylindrical portion 103, and the locus of a point such that it connects the protrusions 106 and 107 is generally spiral as against the central axis of the cylindrical portion 103. Accordingly, it is easy to insert the hose 102 into the hose cover 101, thereby facilitating the assembling job, and the protrusions 106 and 107 may be inserted into the spirally formed depression. As a result, the fastening strength of the hose cover 101 and the hose 102 may be increased. And, by forming the inner tube 111, which generally contacts with the inner periphery 110 of



the hose 102, on the hose cover 101, it is possible to make the hose 102 and the hose cover 101 to come in air-tight contact with each other.

[0093] Thus, the hose unit 100 in accordance with the present embodiment is not complicated in die construction and assures a low cost. Also, it is possible to maintain the fastening strength of the hose cover 101 and the hose 102 without using an adhesive agent to secure the hose cover 101 and the hose 102, thereby improving the assembling workability and quality.

[0094] Further, by installing the above hose unit for electric vacuum cleaners at one end of the hose at least which connects the dust collecting chamber to the suction unit, it is possible to make the assembling job easier and to provide an inexpensive electric vacuum cleaner.

## Claims

### 1. An electric vacuum cleaner, comprising:

a cleaner main body, and  
a suction unit which is rotatably disposed at the bottom of said cleaner main body and is provided with a suction port and a rotary brush, wherein said cleaner main body includes a fan chamber equipped with an electric fan located at the bottom,  
a dust collecting chamber located above said fan chamber, and  
a handle having a grip portion located above said dust collecting chamber, and  
said handle and said electric fan at least are installed at the rear of said cleaner main body.

### 2. The electric vacuum cleaner as defined in claim 1, further comprising a cover, wherein said cover is disposed so as to cover an electric fan section except said handle.

### 3. The electric vacuum cleaner as defined in claim 2,

wherein said cleaner main body further includes a control circuit board, and  
wiring connected to said electric fan, and wiring connected to said control circuit board, and  
wherein each of said wiring is arranged between said dust collecting chamber and said cover at the rear of said dust collecting chamber.

### 4. The electric vacuum cleaner as defined in claim 1 or 2,

wherein said cleaner main body further includes wiring connected to said electric fan, and wiring connected to said control circuit board, and

each of said wiring is arranged between said dust collecting chamber and said cover at the rear of said dust collecting chamber.

### 5. An electric vacuum cleaner, comprising:

- (a) a suction unit having a suction port to take in dust,
- (b) a cleaner main body to house an electric fan and a dust collecting bag, said cleaner being disposed for universal movement on said suction unit,
- (c) a caster roller, and
- (d) a support portion,

wherein said cleaner main body has a cam mechanism formed in one piece with a part thereof,  
said support portion is disposed at least retractably or rotatably, and further, said support portion is disposed so as to prevent said cleaner main body from falling down when said cleaner main body is set upright,  
said support portion has an abutment portion that abuts on the floor surface only with said cleaner main body kept upright, and  
said support portion is disposed so that the position of said abutment portion is outside the plane projected on said floor surface by said caster roller and the front end of said suction unit.

### 6. The electric vacuum cleaner as defined in claim 5, wherein said roller is rotatably installed on said abutment portion of said support portion.

### 7. The electric vacuum cleaner as defined in claim 5,

wherein said support portion has an activating means, and  
with the cleaner main body inclined in a state of using, said support portion is activated by said activating means so that the support portion moves off by a specific distance from the floor surface.

### 8. The electric vacuum cleaner as defined in claim 5, wherein said support portion is disposed at least one of retractably and rotatably so that the support portion is movable in the direction of said suction unit when said cleaner main body is in an upright position.

### 9. The electric vacuum cleaner as defined in claim 5, wherein said support portion is disposed so that the support portion moves off by a specific distance from the floor surface due to said cam mechanism when said cleaner main body is inclined in a

state of using.

10. The electric vacuum cleaner as defined in claim 5, further comprising a hose connected to said cleaner main body,

wherein said hose is connected to the side same as the side where said abutment portion is located when said cleaner main body is set upright.

11. The electric vacuum cleaner as defined in claim 5,

wherein said cleaner main body has a roller fixing portion formed at the bottom thereof, said caster roller is rotatably installed on said roller fixing portion, and said roller fixing portion has an outer diameter nearly identical with the outer diameter of said caster roller.

12. The electric vacuum cleaner as defined in claim 5, further comprising a release pedal,

wherein said release pedal is operated to shift down said cleaner main body, and said release pedal is disposed so as to protrude neither from the rear end nor from the top end of the caster roller.

13. The electric vacuum cleaner as defined in claim 5, further comprising a release pedal,

wherein said release pedal is operated to shift down said cleaner main body, and when said release pedal is operated, said release pedal abuts on said caster roller.

14. The electric vacuum cleaner as defined in claim 11, wherein said roller fixing portion is disposed in a manner such that said electric fan is covered by the roller fixing portion.

15. An electric vacuum cleaner, comprising:

(a) a suction unit having a suction port to take in dust,

(b) a cleaner main body to house a dust collecting chamber and an electric fan, which is disposed for universal movement on said suction unit,

(c) a caster roller,

(d) a hose detachably connected to said suction unit, said hose being disposed so as to establish communication between said suction unit and said dust collecting chamber, and

(e) a support portion retractably installed so as to support said cleaner main body when said cleaner main body is set in an upright position, wherein said support portion is disposed so that

the support portion is protruded behind the rotational center of said caster roller when said hose is removed from said suction unit.

16. The electric vacuum cleaner as defined in claim 15, further comprising an activating means,

wherein said cleaner main body has a hose fixing portion to fix said hose thereto, said support portion has a rotational center near said hose fixing portion and is installed so as to be rotatable within the range of a predetermined angle in the forward and backward direction, and is activated backward by said activating means, and when said hose is fixed to said hose fixing portion, a part of said hose pushes said support portion forward while abutting thereon so that said support portion is retracted.

17. The electric vacuum cleaner as defined in claim 15 or 16,

wherein said hose includes a depression formed in a position where the hose abuts on said support portion, and a part of said support portion is inserted in said depression.

18. The electric vacuum cleaner as defined in claim 15 or 16,

wherein said hose includes a depression formed in a position where the hose abuts on said support portion, and a part of said support portion is inserted in said depression.

19. The electric vacuum cleaner as defined in claim 18, wherein said support portion includes a traveling means disposed on a part where the support portion comes in contact with the floor.

20. The electric vacuum cleaner as defined in claim 15 or 16,

wherein said cleaner main body has a hose fixing portion to fix said hose thereon, said hose provides communication between said suction port of said suction unit and said hose fixing portion, and said support portion in a state of being retracted serves to cover at least a part of the rear portion of said hose.

21. The electric vacuum cleaner as defined in claim 15 or 16,

wherein, with said support portion protruded

backward, when the cleaner main body is inclined backward about a contact portion between the bottom end of said support portion and the floor surface, said contact portion is positioned ahead of the upper rotational center of said support portion, and in this condition, said support portion is subjected to the weight pressure of said cleaner main body, and thereby, said support portion is automatically retracted.

22. The electric vacuum cleaner as defined in claim 15, further comprising a switch and a solenoid valve,

wherein said cleaner main body has a hose fixing portion;  
said switch is disposed near said hose fixing portion, and said switch has function to turn ON or OFF with said hose attached or detached; when said hose is detached, said switch turns ON, and  
said solenoid valve is operated as it is interlocked with said switch, then said support portion which can freely retract and protrude in the forward and backward direction is protruded backward.

23. An electric vacuum cleaner, comprising:

(a) a suction unit having a suction port to take in dust,  
(b) a cleaner main body to house a dust collecting chamber and an electric fan, said cleaner being disposed for universal movement on said suction unit,  
(c) a caster roller,  
(d) a handle to operate said cleaner main body,  
(e) a support portion which can freely retract and protrude, having a function to support said cleaner main body kept in an upright position, and  
(f) a switch installed in at least one selected from the group consisting of said handle, said cleaner main body and said suction unit,

wherein said switch selects the position of retraction or protrusion of said support portion.

24. A hose unit for electric vacuum cleaners, comprising

a hose and  
a hose cover,

wherein said hose cover includes a cylindrical portion in which said hose is inserted, an opening formed in a part of said cylindrical portion, and a protrusion disposed on the inner wall of said cylindrical portion along said opening.

25. The hose unit for electric vacuum cleaners as defined in claim 24,

wherein said opening includes a plurality of openings,  
said protrusion includes a plurality of protrusions, and  
said plurality of protrusions are formed asymmetrical in relation to the central axis of said cylindrical portion.

26. The hose unit for electric vacuum cleaners as defined in claim 25,

wherein said plurality of protrusions are formed along the inner wall of the cylindrical portion in a manner such that the locus of a point such that it connects said plurality of protrusions is generally spiral as against the central axis of the cylindrical portion.

27. The hose unit for electric vacuum cleaners as defined in claim 25 or 26,

wherein said hose cover includes a hose abutting wall disposed at the end of said cylindrical portion, and an inner tube that generally contacts with the inner periphery of said hose.

28. An electric vacuum cleaner, comprising:

a suction unit,  
a dust collecting chamber to collect dust,  
an electric fan for suction,  
a hose that provides communication between said dust collecting chamber and said suction unit, and  
a hose unit for electric vacuum cleaners of claim 27,  
wherein said hose unit is disposed at one end of said hose at least.

Fig.1

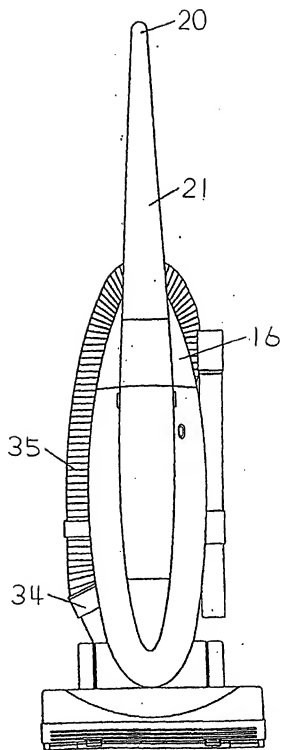


Fig. 2

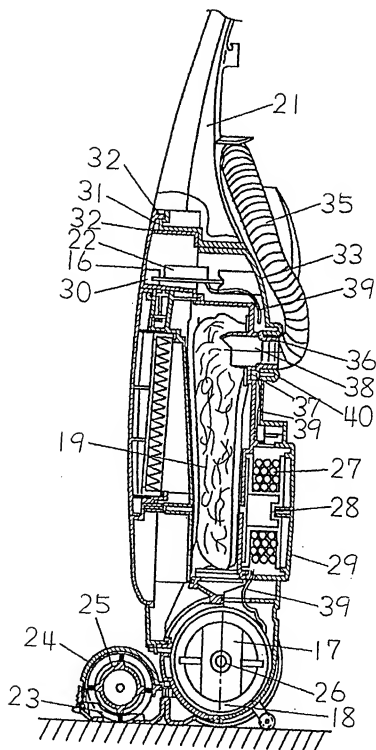


Fig.3

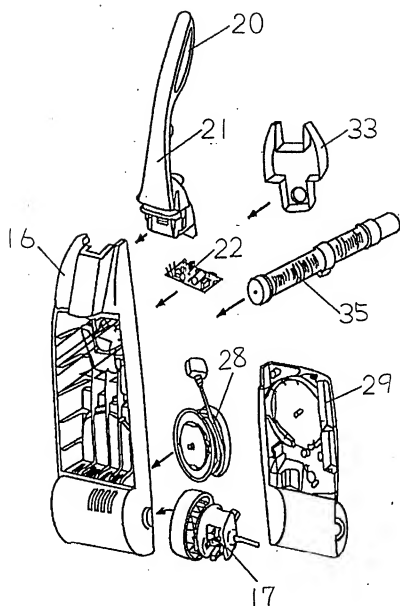


Fig. 4

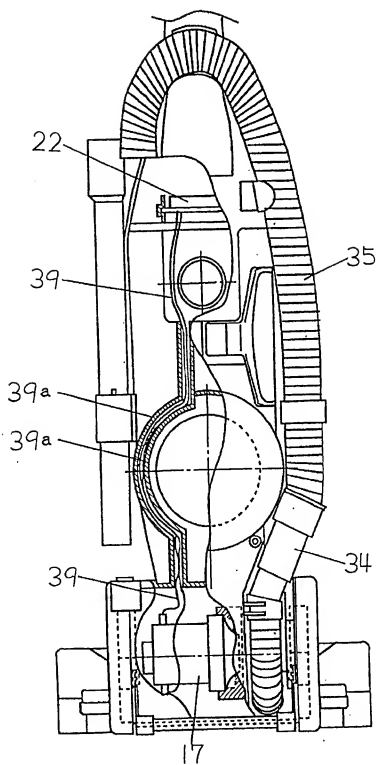


Fig.5

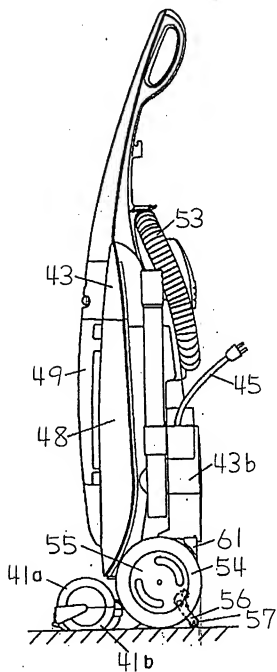




Fig. 6

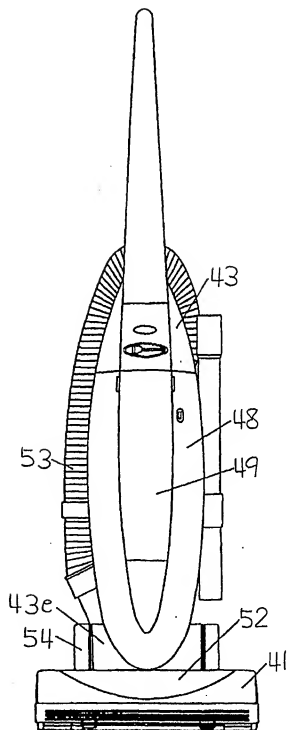


Fig.7

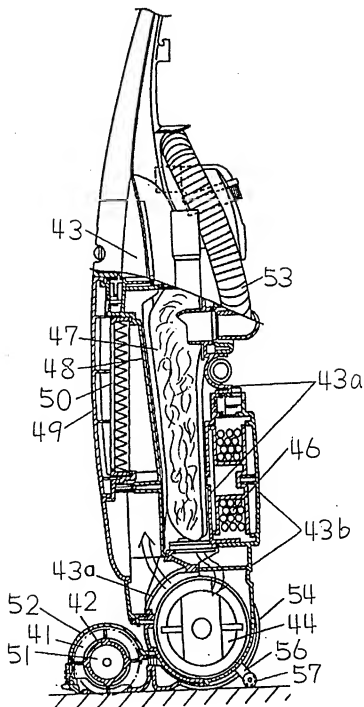


Fig. 8

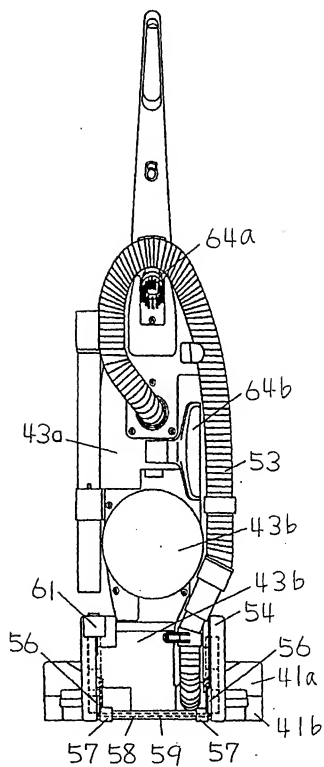


Fig. 9

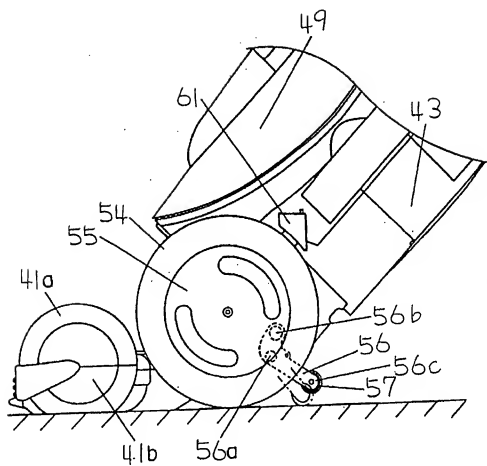


Fig.10

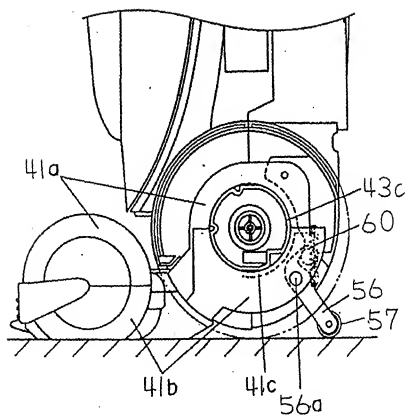


Fig. 11

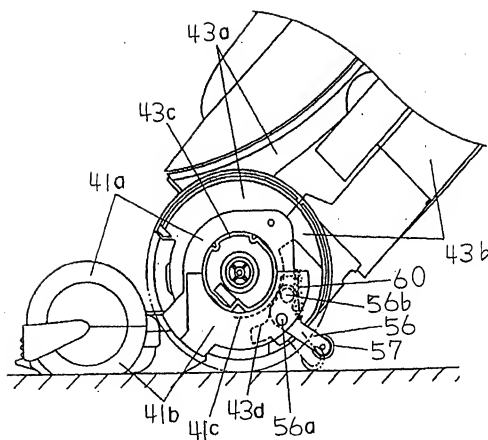


Fig. 12

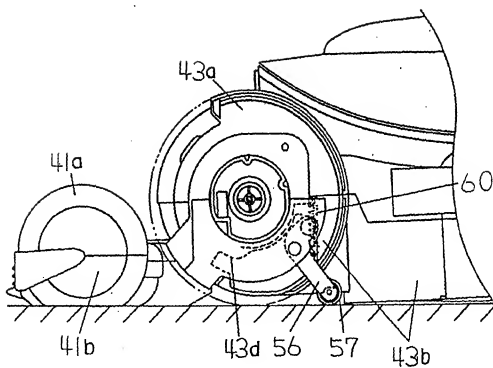


Fig.13

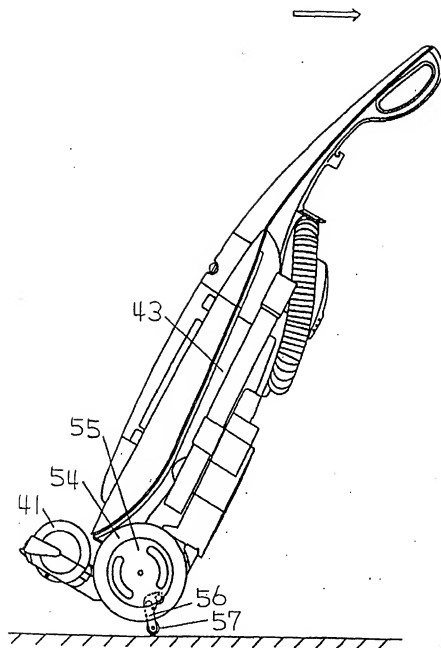




Fig.14

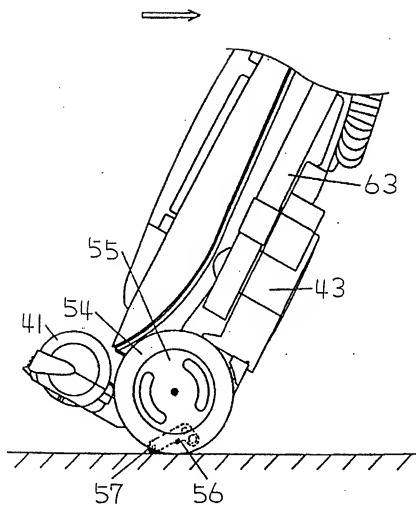


Fig.15

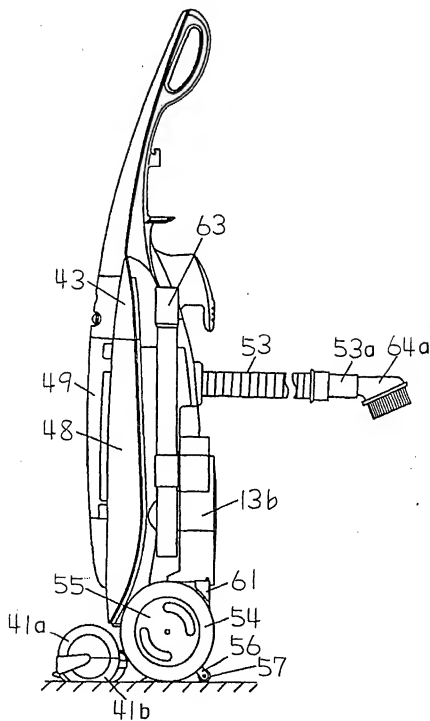


Fig.16

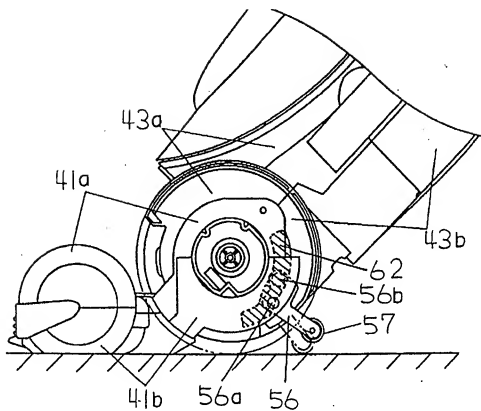


Fig.17




Fig. 18

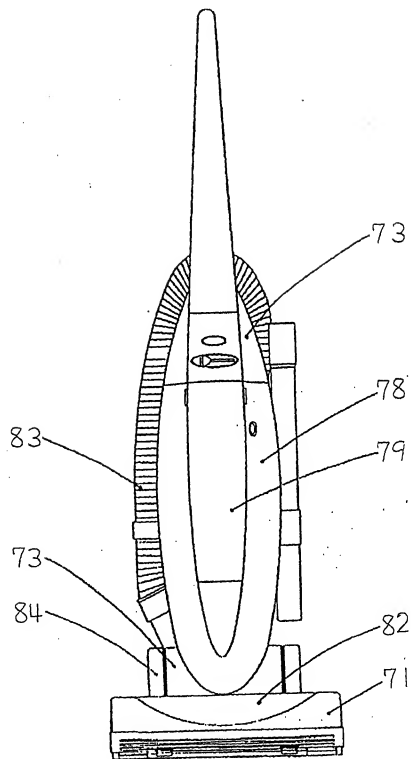


Fig. 19

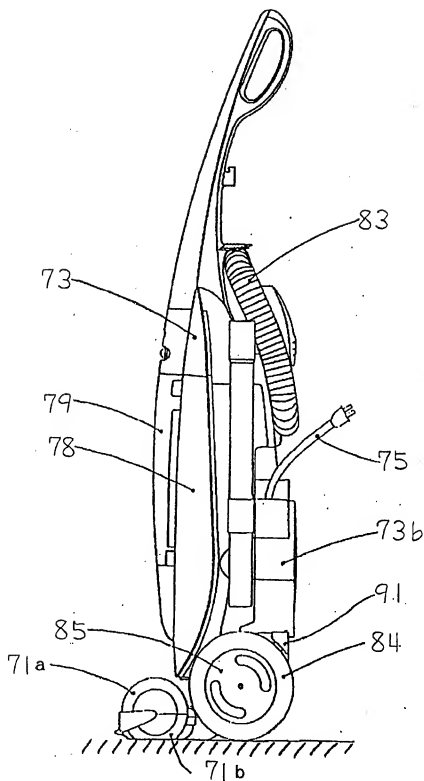


Fig. 20

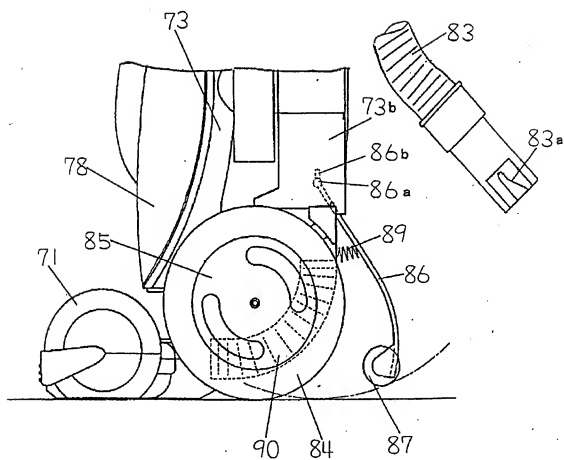


Fig. 21

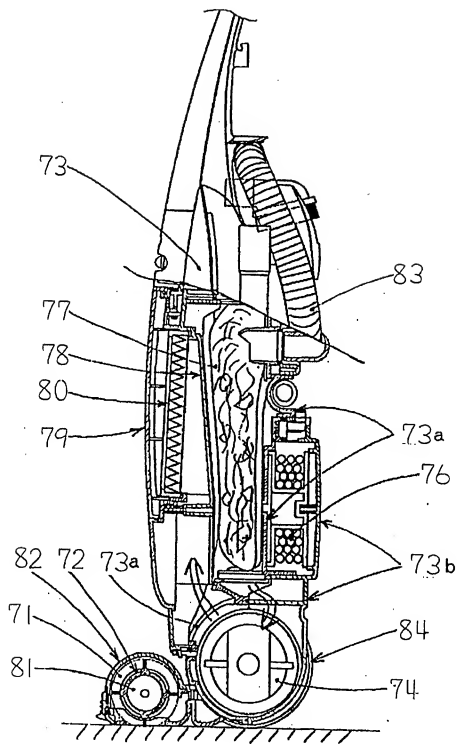


Fig. 22

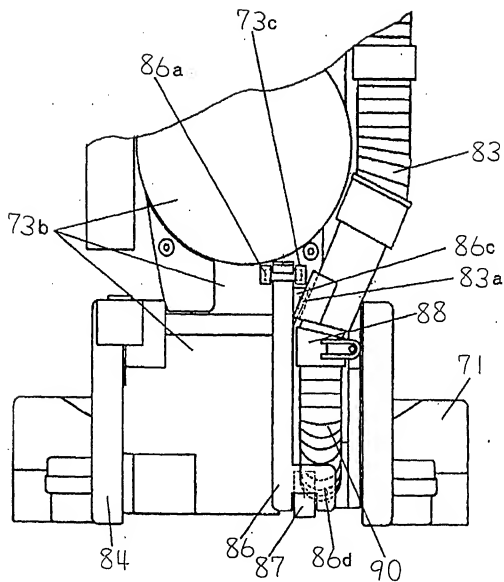




Fig. 23

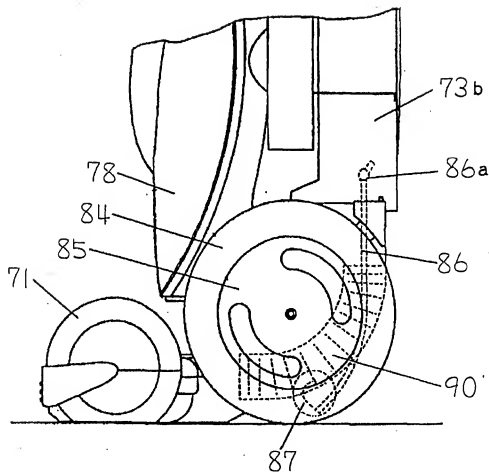


Fig. 24

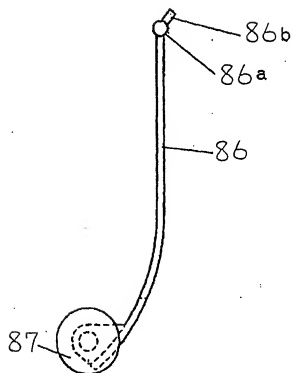


Fig. 25

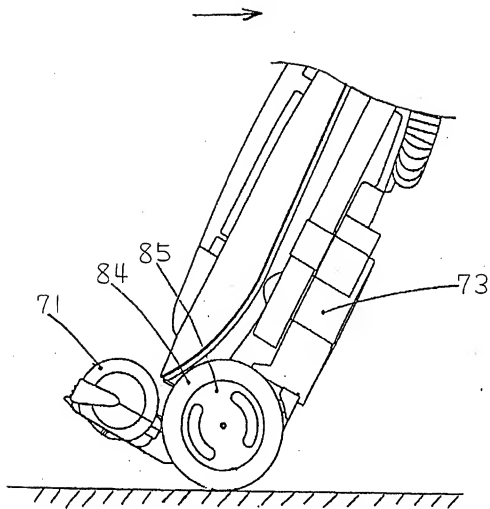


Fig. 26

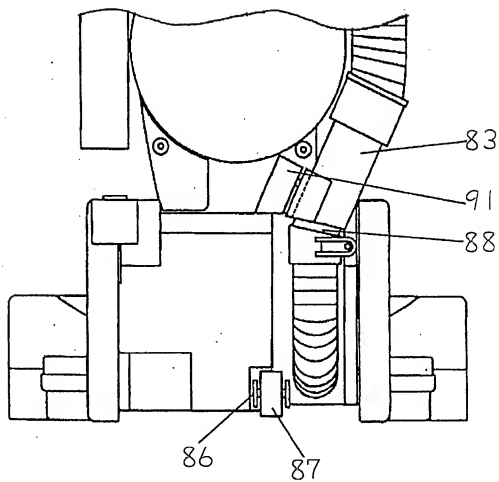


Fig. 27

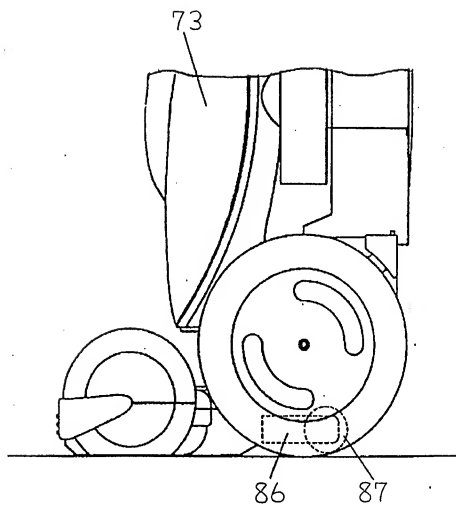


Fig. 28

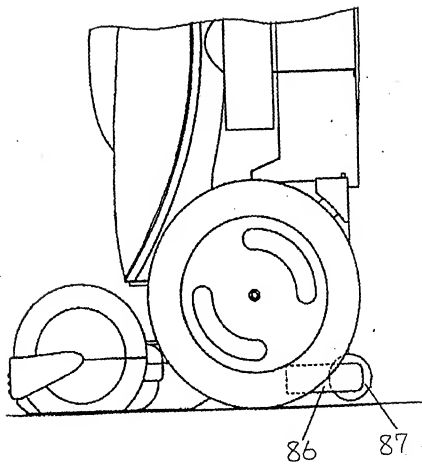


Fig. 29

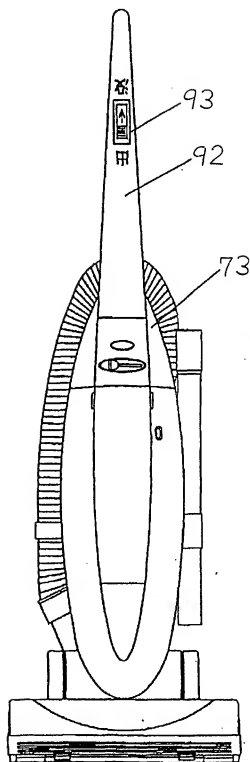


Fig. 30

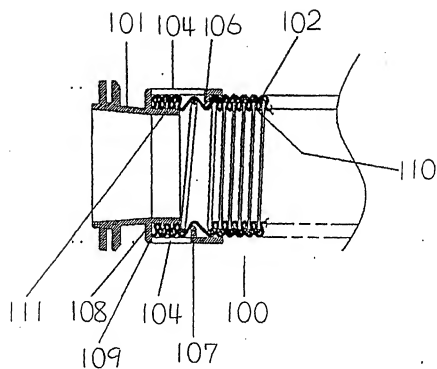




Fig. 31

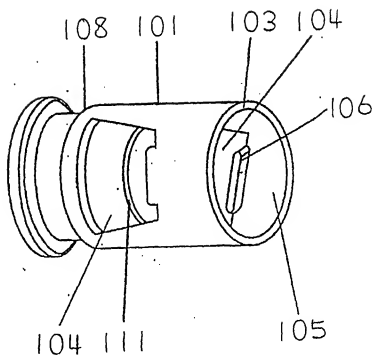


Fig. 3 2

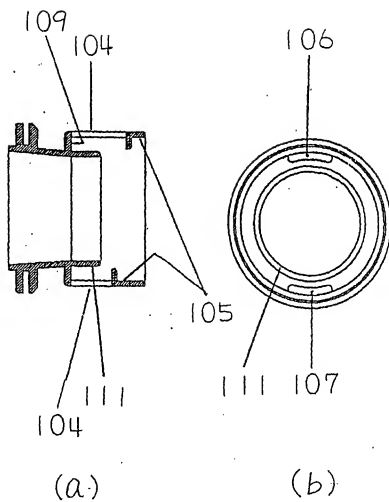


Fig.33




Fig. 34

PRIOR ART

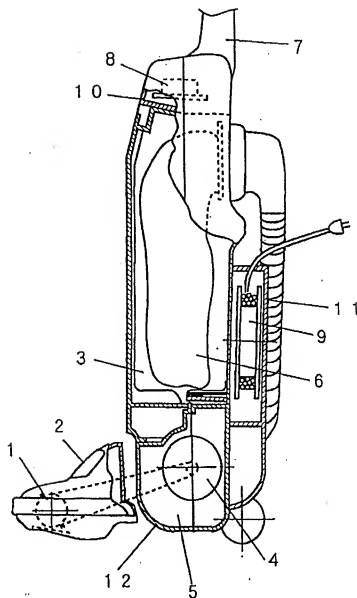


Fig. 35

PRIOR ART

